

Polyethylene tape, for isolating sealants from concrete and joint fillers

Uses

Used in joint sealing applications to ensure sealant only adheres to two faces of the joint.

Polyethylene tape for isolating sealant and eliminating adhesion to filler boards.

Description

A 125 micron Black Hi Tack Polyethylene construction tape that has excellent conformability to irregular surfaces. The Bond Breaker Tape provides an Anti electrolytic barrier between dissimilar metals and has good adhesion to most building materials.



The simplest way to prevent the sealant adhering to the wrong surface is to apply a self adhesive polyethylene tape (bond breaker tape) along the whole width / length of base of the joint.

Supply

66 m per roll, available in the following widths:

12 mm, 15 mm, 20 mm, 25 mm, 50 mm

671060	Bond Breaking Tape 12 mm x 66 m roll
671061	Bond Breaking Tape 15 mm x 66 m roll
671062	Bond Breaking Tape 20 mm x 66 m roll
671063	Bond Breaking Tape 25 mm x 66 m roll
671064	Bond Breaking Tape 50 mm x 66 m roll

Storage


Store in cool, dry conditions.

Technical Support

Parchem offers a comprehensive range of high performance, high quality construction products. Parchem offers a technical support package to specifiers and contractors as well as on-site technical advice from staff with experience in the construction industry.

Application Instructions

Clean joint surface, free from dust and other contaminants.

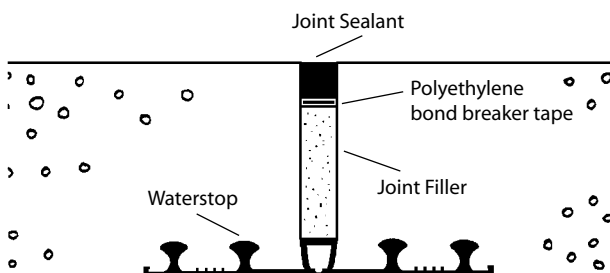

In a typical joint the sealant should adhere to both opposite surfaces of the sealant slot but not to its base, in simple terms we are after two sided adhesion not three sided adhesion.

Bond Breaker Tape

Important notice

A Safety Data Sheet (SDS) and Technical Data Sheet (TDS) are available from the Parchem website or upon request from the nearest Parchem sales office. Read the SDS and TDS carefully prior to use as application or performance data may change from time to time. In emergency, contact any Poisons Information Centre (phone 13 11 26 within Australia) or a doctor for advice.

Product disclaimer

This Technical Data Sheet (TDS) summarises our best knowledge of the product, including how to use and apply the product based on the information available at the time. You should read this TDS carefully and consider the information in the context of how the product will be used, including in conjunction with any other product and the type of surfaces to, and the manner in which, the product will be applied. Our responsibility for products sold is subject to our standard terms and conditions of sale. Parchem does not accept any liability either directly or indirectly for any losses suffered in connection with the use or application of the product whether or not in accordance with any advice, specification, recommendation or information given by it.