

Fosroc® Proofex® Protection Board PP



constructive solutions

Tear resistant, semi flexible Polypropylene protection board

Uses

Proofex Protection Board PP provides protection for all of the Parchem range of waterproofing membranes.

It protects retaining walls, planter boxes, lift pit walls and general areas that are going to be subjected to back-filling practices.

Proofex Protection Board PP can also be used for the protection of carpeted areas, vanity tops, benches, internal lift walls and floor during the construction process.


Advantages

- Protects membrane from impacts
- Suited for vertical and horizontal applications
- Simple adhesive or tape fixing
- Light weight and easy to transport and handle
- Rot proof
- Cost effective

Description

Proofex Protection Board PP is a polypropylene, impact resistant membrane protection board. It is designed to give impact, puncture and damage resistance to the Fosroc range of membrane systems.

Resistance to puncture: >1300 N

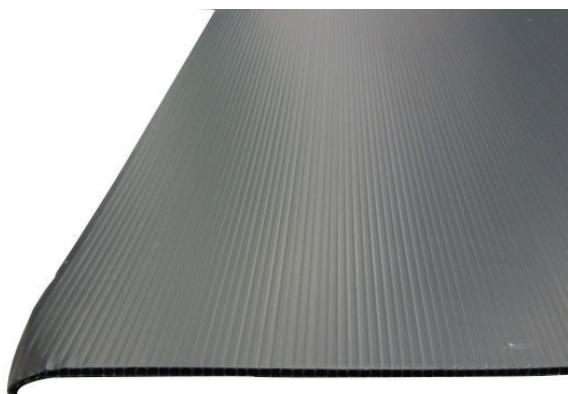

Important notice

A Safety Data Sheet (SDS) is available from the Fosroc website. Read the SDS and TDS carefully prior to use as application or performance data may change from time to time. In emergency, contact any Poisons Information Centre (phone 13 11 26 within Australia) or a doctor for advice.

Product disclaimer

This Technical Data Sheet (TDS) summarises our best knowledge of the product, including how to use and apply the product based on the information available at the time. You should read this TDS carefully and consider the information in the context of how the product will be used, including in conjunction with any other product and the type of surfaces to, and the manner in which, the product will be applied. Our responsibility for products sold is subject to our standard terms and conditions of sale. Parchem does not accept any liability either directly or indirectly for any losses suffered in connection with the use or application of the product whether or not in accordance with any advice, specification, recommendation or information given by it.

Application Instructions

Application

Apply sheets to a clean dry surface with either an adhesive compound/sealant or double sided tape such as Proofex Detail Strip.

Apply adhesive at approx. 400mm centres.

Joints may be butted together. Sheets may be sealed by way of waterproof adhesive tape, such as duct tape.

Note

For areas where a drainage sheet is appropriate: such as planter boxes, landscape areas, retaining walls etc. Proofex Sheetdrain 81 (a dimpled protection and drainage membrane in high-density extruded polyethylene with continuous filament yarn) may be used in place of or as well as the Proofex Protection Board PP.

Not designed for permanent UV exposure.

Being of a light weight material, Proofex Protection Board PP should be secured to prevent displacement by wind gusts.

Supply

Proofex Protection Board PP is supplied in sheets 1800mm x 1220mm x 3mm

Material code: FC071079-UNIT

Coverage

Each sheet will cover approximately 2m²

Storage

Proofex Protection Board PP should be stored out of direct sunlight.



constructive solutions

*Sold under license from Fosroc International Limited. Fosroc, Proofex and the Fosroc logo are trade marks of Fosroc International Limited, used under license.

Parchem Construction Supplies Pty Ltd

7 Lucca Road, Wyong NSW 2259

Ph: 1800 812 864

www.fosroc.com.au

ABN 80 069 961 968

Distributed in New Zealand by: Concrete Plus Ltd

150 Hutt Park Road Gracefield Ph: 0800 657 156

www.fosroc.co.nz

NZBN 9429033691282