

Economical pre-greased galvanised slipjoints

Uses

To take movement on a light load and less critical load bearing structure such as corbels, brick or masonry block applications.

Description

Pre-greased galvanised slipjoint that consists of graphite grease sandwiched between two layers of galvanised sheet metal. The graphite grease is used as the lubricant / slippage medium for the product.

The galvanised slipjoint can be supplied flat or to suit cavity wall / bridge applications and comes taped at each end for ease of installation.

Supply

Galvanised slipjoint is supplied in 3 m lengths and is available in the following sizes.

Flat Strips; 90 mm, 110 mm, 150 mm, 190 mm, 200 mm, 230 mm, 250 mm, 270 mm, 300 mm

Cavity Bridge; 250 mm, 270 mm


Product Code

2200951	Slipjoint 90mm X 3m / Each
2200952	Slipjoint 110mm X 3m / Each
2200953	Slipjoint 150mm X 3m / Each
2200954	Slipjoint 200mm X 3m / Each
2200955	Slipjoint 190mm X 3m / Each
2200956	Slipjoint 230mm X 3m / Each
2200957	Slipjoint 250mm X 3m / Each
2200958	Slipjoint 270mm X 3m / Each
2200959	Slipjoint 300mm X 3m / Each
2200950	Slipjoint Cavity Wall 230mm X 3m / Each
2200961	Slipjoint Cavity Wall 250mm X 3m
2200962	Slipjoint Cavity Wall 270mm X 3m

Application

Prepare surface of concrete / brickwork to receive the slipjoint so that it is level and sound. Hold the slipjoint in position using adhesive if practical making sure there are no gaps between the joined lengths.

Make sure that the complete surface of the required seating is covered with slipjoint, do not forget to allow for any expansion joint materials if specified. Placement of concrete should be done with care making sure no damage is done to the slipjoint with concrete vibrators etc.

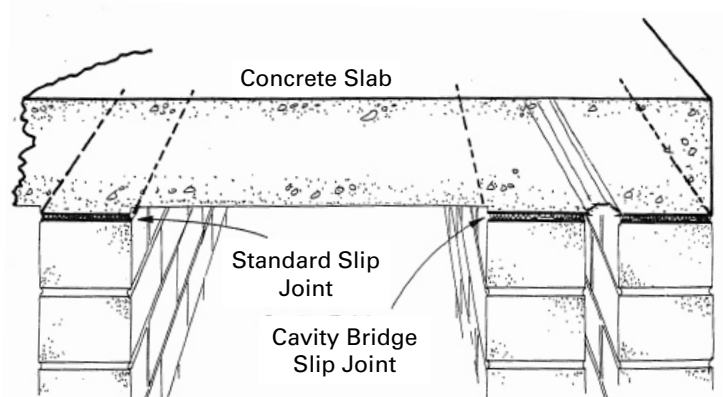

Galvanised Slipjoint

Important notice

A Safety Data Sheet (SDS) and Technical Data Sheet (TDS) are available from the Parchem website or upon request from the nearest Parchem sales office. Read the SDS and TDS carefully prior to use as application or performance data may change from time to time. In emergency, contact any Poisons Information Centre (phone 13 11 26 within Australia) or a doctor for advice.

Product disclaimer

This Technical Data Sheet (TDS) summarises our best knowledge of the product, including how to use and apply the product based on the information available at the time. You should read this TDS carefully and consider the information in the context of how the product will be used, including in conjunction with any other product and the type of surfaces to, and the manner in which, the product will be applied. Our responsibility for products sold is subject to our standard terms and conditions of sale. Parchem does not accept any liability either directly or indirectly for any losses suffered in connection with the use or application of the product whether or not in accordance with any advice, specification, recommendation or information given by it.