


Fosroc® Hydrocor Type 106 / Type 3

FOSROC



constructive solutions

Range of self expanding cork joint filler

Uses

Forming and filling expansion and static joints in:

- Water retaining structures
- Water excluding structures
- Roads, bridges and carparks
- Internal or external traffic areas

Advantages

- Supports sealants subject to hydrostatic pressure
- Expands to fill joint
- Will not extrude under pressure
- Light weight and easy to handle
- Resilient and waterproof

Standards Compliance

Hydrocor Type 106

ASTM Specification D1752-84 (Type 111)
Dept of Housing & Construction Specification RA SS 106

Hydrocor Type 3

ASTM Specification D1752-84 (Type 111)
US Federal Specification HH-F-341F (Type 11, Class C)

Description

Hydrocor comprises a range of joint fillers made from cork granules bound together with insoluble, synthetic resin. Hydrocor expands when exposed to moisture and provides the necessary semi-rigid, void-free backing for elastomeric sealants subject to hydrostatic pressures.

Hydrocor Type 106: self-expanding joint filler and sealer.
Hydrocor Type 3: self-expanding joint filler only.

Technical Support

Parchem offers a technical support package to specifiers and contractors as well as on-site technical advice from staff experienced in the construction industry.

Design Criteria

Water retaining structures

Hydrocor Type 106 and Type 3 provide semi-rigid backing essential to joint sealing system in dams, reservoirs, culverts, canals, sea walls and water treatment or storage structures. Used in conjunction with suitable joint sealer.


Internal & external traffic areas

Hydrocor Type 106 and Type 3 provide the necessary support for joint sealants subject to pedestrian or wheeled traffic. Where traffic loads may be high it is preferable to recess the joint sealant approximately 2 mm below the surface to avoid direct abrasion.

Water excluding structures

Hydrocor is suitable for filling expansion joints in basements, subways and site slabs.

Examples of sealed expansion joint:

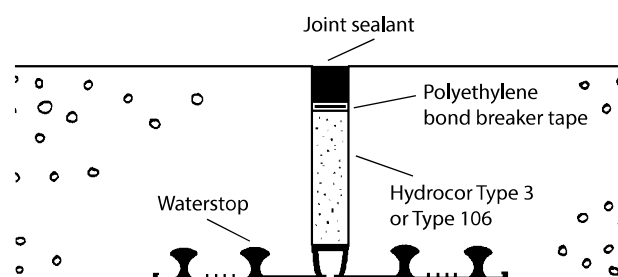

Properties

Technical data Hydrocor Type 106

Form:	Compressible sheet, resin bonded cork
Recovery after 50% compression:	Greater than 90%, less than 6 mm (under test conditions)
Extrusion at 50% compression:	Less than 1 mm in use
Load required to compress to 50%:	1 - 2 MPa
Expansion in boiling water (1 hour):	40% minimum
Expansion in cold water (72 hours):	24% minimum

Technical data Hydrocor Type 3

Form:	Compressible sheet, resin bonded cork
Recovery after 50% compression:	Greater than 90% Less than 6 mm (under test conditions)
Extrusion at 50% compression:	Less than 1 mm in use
Load required to compress to 50%:	1.3 - 1.5 MPa
Expansion in boiling water (1 hour):	40% minimum

Fosroc® Hydrocor Type 106 / Type 3

Application Instructions

Do not remove waterproof wrapping from Hydrocor until immediately prior to fixing. Hydrocor must be fixed against one section of concrete after shutter removal.

Hydrocor is fixed in place by bonding to concrete using Fosroc Construction Adhesive. The next section of concrete is then poured in place with minimal delays, directly against the Hydrocor. After initial cure of the concrete, the top section of the Hydrocor is removed by power grinder or saw to form a sealing slot of the required dimensions.

To avoid the cutting or grinding step, Hydrocor may be initially placed below concrete surface (at depth of required sealing slot) then another section of Hydrocor, timber or polystyrene foam placed above the fixed Hydrocor, reaching to the concrete surface. This unattached top section of filler is easily removed once concrete has cured.

Note: a polyethylene bond breaker tape must be applied over the Hydrocor prior to application of the joint sealant. See individual Technical Data Sheets for details.

Limitations

Hydrocor may cause staining of the surrounding concrete in damp conditions, especially light coloured concrete or where exposed aggregate finishes are produced by high pressure hosing. Staining usually disappears after 6-8 weeks normal weathering. Hydrocell, a non staining polyethelene foam filler may be more suitable in such applications.

Supply

Hydrocor Type 3: sizes from 50 mm to 610 mm in width, thicknesses of 10 mm - 25 mm. Standard length is 1.84 m or 930 mm.

Hydrocor Type 106: sizes from 50 mm to 500 mm in width, thicknesses of 12 mm. Standard length is 915 mm.

Storage

12 months in original containers when kept in cool, dry conditions.

Important notice

A Safety Data Sheet (SDS) and Technical Data Sheet (TDS) are available from the Parchem website or upon request from the nearest Parchem sales office. Read the SDS and TDS carefully prior to use as application or performance data may change from time to time. In emergency, contact any Poisons Information Centre (phone 13 11 26 within Australia) or a doctor for advice.

Product disclaimer

This Technical Data Sheet (TDS) summarises our best knowledge of the product, including how to use and apply the product based on the information available at the time. You should read this TDS carefully and consider the information in the context of how the product will be used, including in conjunction with any other product and the type of surfaces to, and the manner in which, the product will be applied. Our responsibility for products sold is subject to our standard terms and conditions of sale. Parchem does not accept any liability either directly or indirectly for any losses suffered in connection with the use or application of the product whether or not in accordance with any advice, specification, recommendation or information given by it.



constructive solutions

Sold under license from Fosroc International Limited.
Fosroc and the Fosroc logo are trade marks of Fosroc International Limited, used under license.

Page 2

Parchem Construction Supplies Pty Ltd
7 Lucca Road, Wyong NSW 2259
Phone: 1300 737 787
www.parchem.com.au
ABN 80 069 961 968

Distributed in New Zealand by: Concrete Plus Ltd
23 Watts Rd, Sockburn 8042 Ph: 0800 657 156