

## Reusable keyjoint former for timber formwork

### Uses

PVC Keyjoint Former is ideal for establishing key joints in concrete pavements, particularly in checker-board layouts.

### Advantages

- Made from PVC – will not rot or corrode away
- Light weight – easy to handle
- Reusable
- Nailed to timber formwork with regular clouts
- Easy removal from concrete

### Description

PVC Keyjoint Formers are available in 2 sizes; the 80 mm size provide a 50 mm key in the concrete and is suitable for concrete pavements up to 150 mm thick; the 112 mm size provide a 72 mm key in the concrete and is suitable for concrete pavements above 150 mm thick.

### Installation Instructions



PVC Keyjoint Former should be positioned in the middle of the slab thickness and is simply nailed through the edge strip of the former to the timber formwork with short clouts.

After pouring the concrete and allowing sufficient curing, the edge formwork is removed including the PVC Keyjoint Former.

### Estimating

#### Supply

Both sizes of PVC Keyjoint Formers are supplied in 3 m lengths

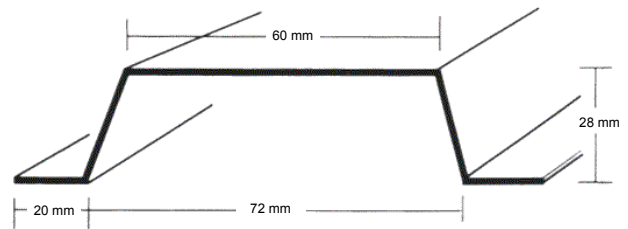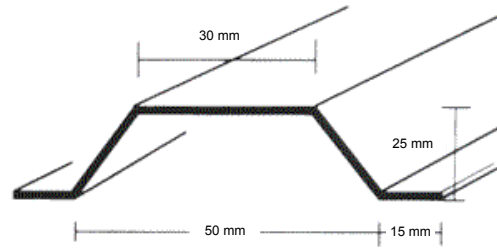

# PVC Keyjoint Former

---

## Important notice

A Safety Data Sheet (SDS) and Technical Data Sheet (TDS) are available from the Parchem website or upon request from the nearest Parchem sales office. Read the SDS and TDS carefully prior to use as application or performance data may change from time to time. In emergency, contact any Poisons Information Centre (phone 13 11 26 within Australia) or a doctor for advice.

## Product disclaimer

This Technical Data Sheet (TDS) summarises our best knowledge of the product, including how to use and apply the product based on the information available at the time. You should read this TDS carefully and consider the information in the context of how the product will be used, including in conjunction with any other product and the type of surfaces to, and the manner in which, the product will be applied. Our responsibility for products sold is subject to our standard terms and conditions of sale. Parchem does not accept any liability either directly or indirectly for any losses suffered in connection with the use or application of the product whether or not in accordance with any advice, specification, recommendation or information given by it.

**Corkjoint**



**Parchem Construction Supplies Pty Ltd**  
7 Lucca Road, Wyong NSW 2259  
Phone: 1300 737 787  
[www.parchem.com.au](http://www.parchem.com.au)  
ABN 80 069 961 968

Distributed in New Zealand by: Concrete Plus Ltd  
23 Watts Rd, Sockburn 8042 Ph: 03 343 0090